

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)


PCT

(10) International Publication Number
WO 2005/048893 A1

- (51) International Patent Classification⁷: **A61F 6/18** (74) Agent: **TURUN PATENTTITOIMISTO OY**; P.O. BOX 99, FI-20521 Turku (FI).
- (21) International Application Number: **PCT/FI2004/000688** (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date:
17 November 2004 (17.11.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20031679 19 November 2003 (19.11.2003) FI
- (71) Applicant (for all designated States except US): **SCHERING OY [FI/FI]**; P.O. BOX 415, FI-20101 Turku (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **JUTILA, Ilkka [FI/FI]**; Lompsa 2 as. 6, FI-21410 Vanhalinna (FI).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), Latin America and the Caribbean (AR, BO, BR, CL, CO, EC, GT, HN, NI, PA, PE, PG, PY, SV, US, VE), NAFTA (CA, MX, US), OAPI (BF, BJ, CF, CG, CI, CM, GN, GU, KE, ML, MR, NE, NG, SN, TD, TG).

[Continued on next page]

(54) Title: **PLUNGER**

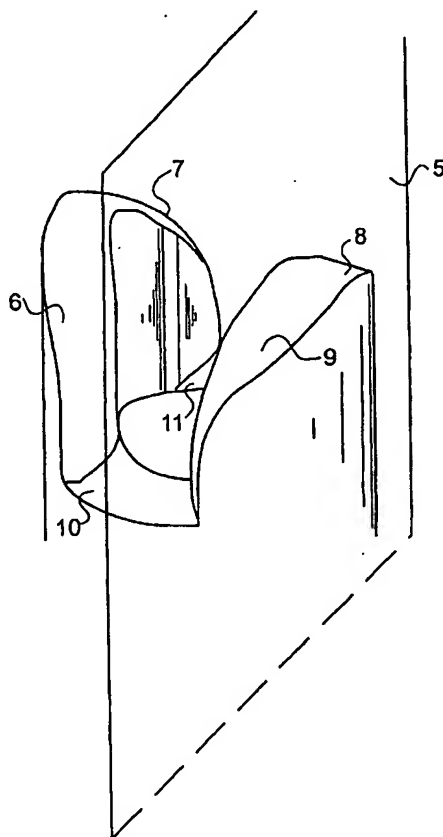

(57) Abstract: The object of the invention is a plunger intended for an inserter for an intrauterine device with a T-body, which plunger has a first end and a second end as well as a first dimension, which is the longitudinal direction of the plunger, and the length of which plunger in its longitudinal direction is substantially larger than the diameter of the cross-section perpendicular to the longitudinal direction, and the cross-section of which plunger is substantially circular, and through which plunger an opening (17) has been arranged in its longitudinal direction so that the longitudinal axis of the opening is substantially the same as the longitudinal axis of the plunger. A plunger according to the invention is characterised in that the opening at the first end of the plunger is arranged to expand in a direction perpendicular to the direction of the longitudinal axis to form a tip portion, so that the tip portion has at least one surface (6, 7, 8, 9, 10, 11), which along at least a portion of the length of the tip portion turns at least 35° in relation to a first plane in parallel with the longitudinal axis and at least 35° in relation to a plane at an angle in relation to the longitudinal axis.

WO 2005/048893 A1



SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report